
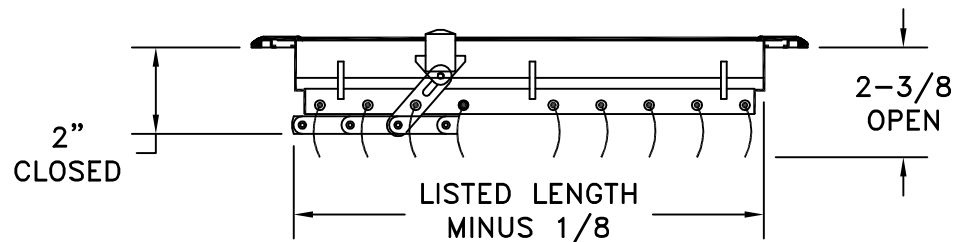
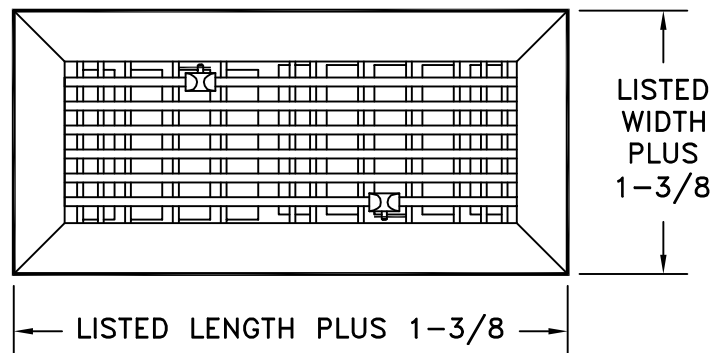


- ALL EXTRUDED ALUMINUM CONSTRUCTION
- HEAVY CROSS BRACING REINFORCEMENT FOR FLOOR USE
- DUAL DIRECTION MULTI-SHUTTER VALVE FOR ADJUSTABLE AIR PATTERN
- NYLON SLIDE VALVE OPERATORS
- BLADE SPACING ON 1/2 INCH CENTERS WITH 5/16 INCH OPENING BETWEEN BLADES
- FINISH: SATIN ANODIZED (SA)

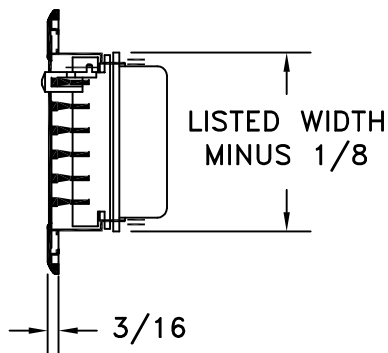

| LISTED SIZE |
|-------------|
| W X L       |
| 2-1/4 X 10  |
| 2-1/4 X 12  |
| 2-1/4 X 14  |
| 4 X 10      |
| 4 X 12      |
| 4 X 14      |
| 6 X 10      |
| 6 X 12      |
| 6 X 14      |

JOB NAME: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 ARCHITECT: \_\_\_\_\_  
 ENGINEER: \_\_\_\_\_  
 CONTRACTOR: \_\_\_\_\_

SUBMITTED BY: \_\_\_\_\_

DATE: 08/13/2013 SD-2100

**531**  
 Extruded Aluminum  
 Floor Diffuser